




KNX design switches

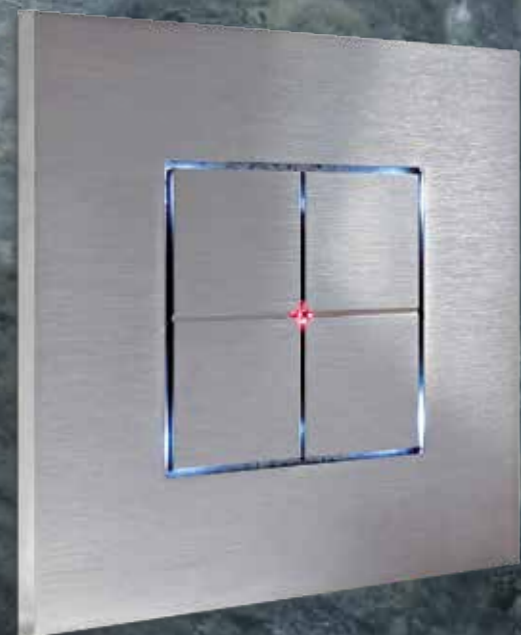

## INDEX

LOLA	4
MONA	10
ZITA	16
LARA	22
ANNA	28
VICTOR - ARNO	34
MARKING	38
SMART VISU	40
PRODUCT OVERVIEW	41

With the new KNX Design Switches it is possible to control a wide variety of building functions e.g. calling lighting scenes, dim lights or lower and raise blinds. If the requirements change, button functions can be reprogrammed easily. The buttons have discreet backlights and a central LED. The LEDs are dimmable and can be adjusted for individual requirements by day / night switching.









# LOLA

# LOLA

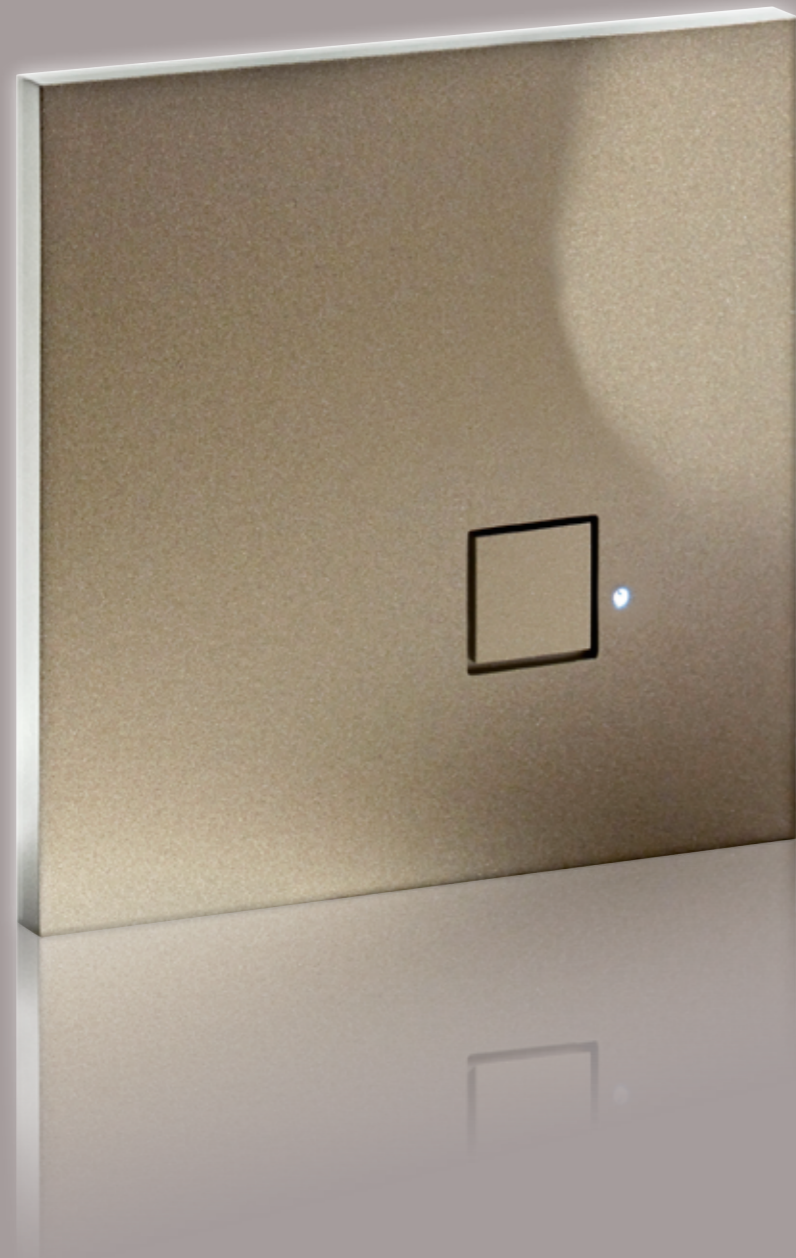


In its form minimalistic and impressive clear - this is how the design switch program LOLA presents itself. The straight edges and lines emphasize the high quality impression of the used materials. Not only the plain form but also the shape reduced functionality is convincing.

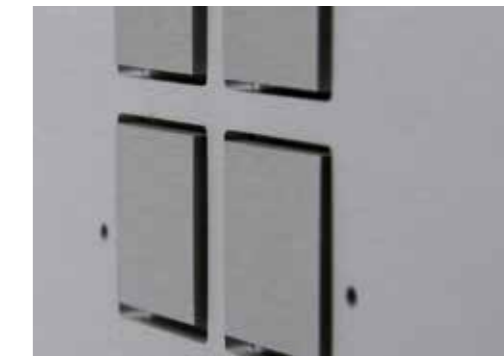

LOLA Alu Natural Anodised

## Color Indications LOLA


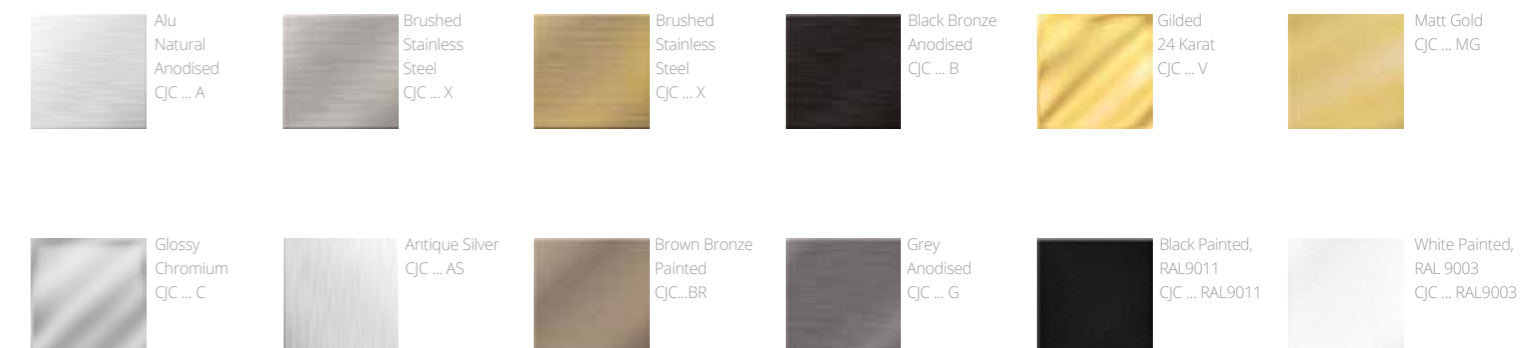


Further RAL Colors on request



# LOLA CARRE

The collection LOLA CARRE with its timeless square frame. Up to 4 KNX switching and controlling functions can be placed space saving in a single frame.

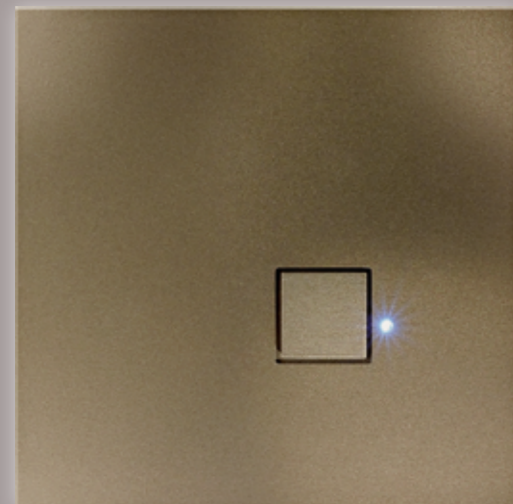

*LOLA CARRE Alu Natural Anodised  
1 KNX push-button with LED*





*LOLA CARRE Grey Anodised  
2+4 KNX push-buttons without LED*




*LOLA CARRE Alu Natural Anodised  
4+4 KNX push-buttons with LED*

# LOLA BANDE

An specifically precious appearance offers the collection LOLA BANDE. Because of the greater frame the puristic design of the switch is emphasised.

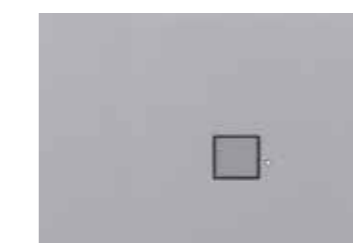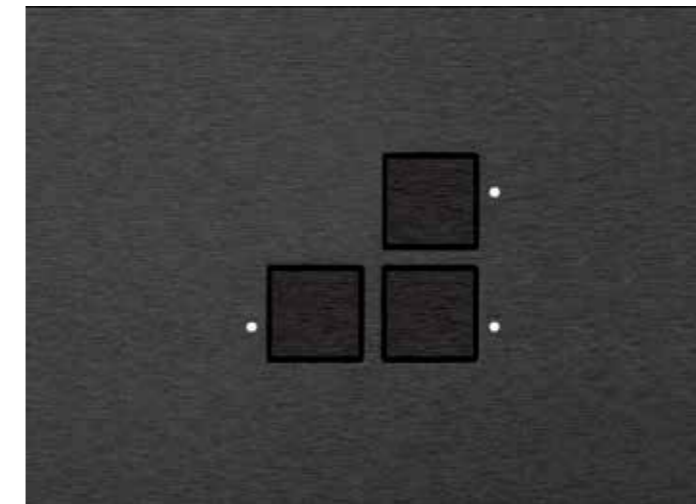

*LOLA BANDE Alu Natural Anodised  
1 KNX push-button with LED*

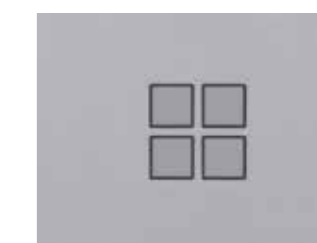

*LOLA BANDE Alu Natural Anodised  
4 KNX push-buttons without LED*



# MONA

# MONA




The minimalistic form of the control element distinguishes the switch collection MONA. The haptics are in accord with the optics. Due to extensive functions for security, convenience and operating efficiency, the program offers versatile possibilities for intelligent home automation.



MONA Brushed Stainless Steel

## Color Indications MONA

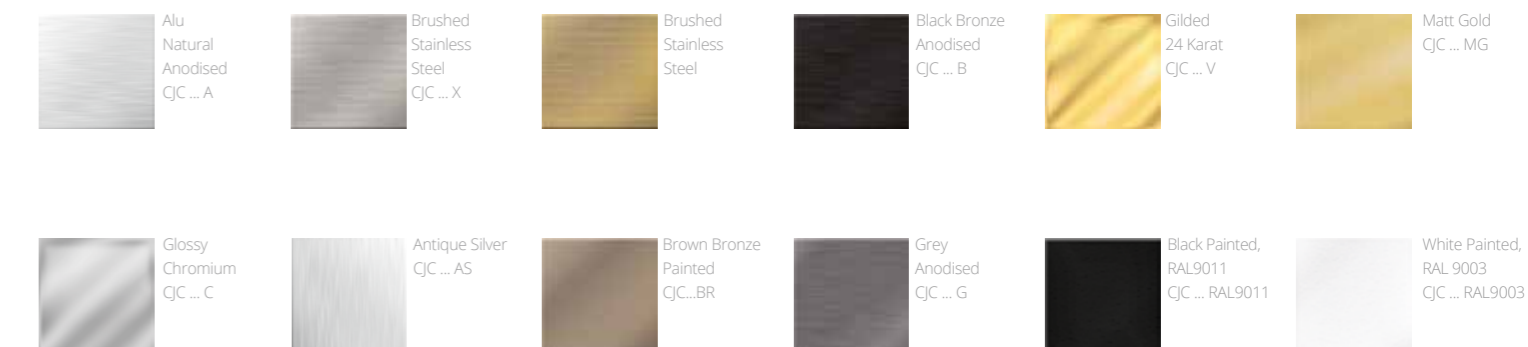

Further RAL Colors on request

# MONA CARRE

The collection MONA CARRE with its timeless square frame. Up to 4 push buttons can be arranged in the form of a quadrat, a triangle or a rhombus.



*MONA CARRE Brushed  
Stainless Steel  
3 KNX push-buttons with white  
LEDs and a central LED*




*MONA CARRE White Painted  
4+4 KNX push-buttons without  
LEDs*



*MONA CARRE Alu Natural  
Anodised  
4 KNX push-buttons with white  
LEDs and a central LED*

# MONA BANDE

MONA BANDE offers highlights in puristic appearance. In particular the reflections of the integrated LEDs emphasise the buttons on the bigger frame.

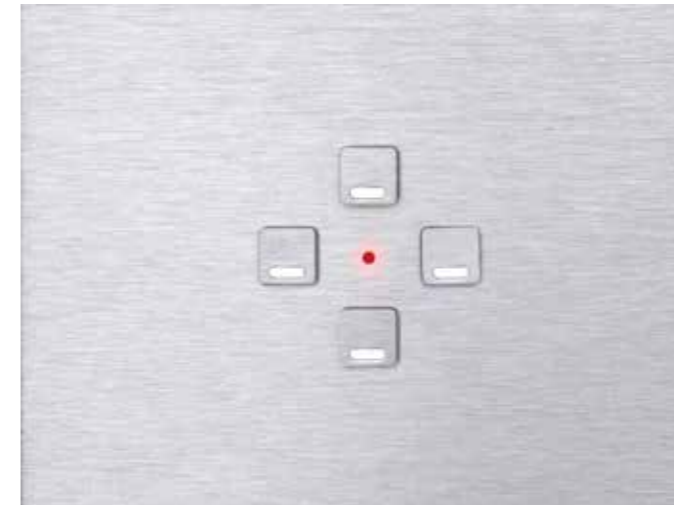

*MONA BANDE Grey Anodised  
2 KNX push-buttons with white LEDs  
and a central LED*



*MONA Bande Black Painted  
1 KNX push-buttons with white LEDs  
and a central LED*





ZITA



# ZITA




Fascinating reflexions and the unusual combination of round control elements and the square frame with a high quality surface distinguishes the collection ZITA.



ZITA Brushed Stainless Steel

## Color Indications ZITA

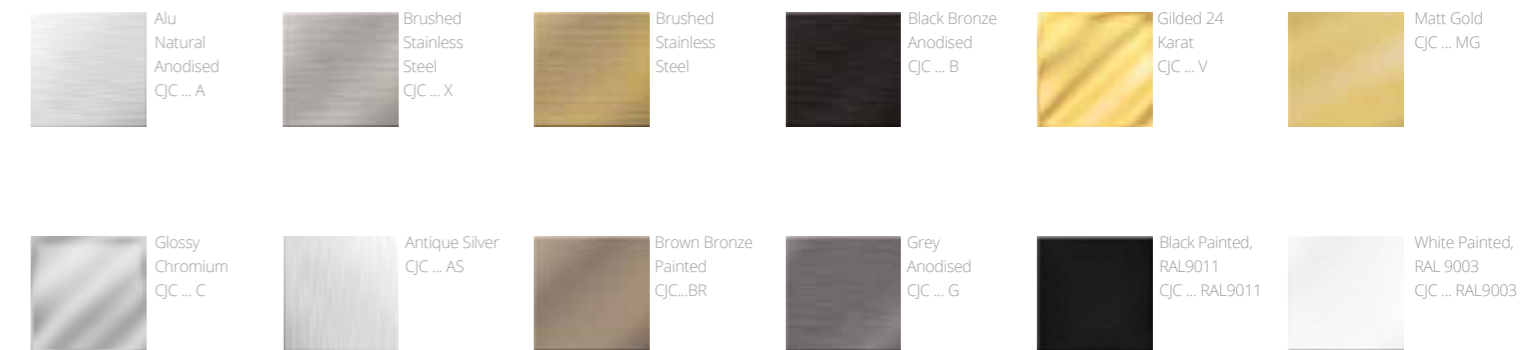

Further RAL Colors on request




## ZITA CARRE

The collection ZITA offers a wide range of smart functions for more convenience, safety and operation efficiency in your building. For example the integrated temperature and humidity sensor may be used to control the room temperature up to an optimal atmospheric environment.




*ZITA CARRE Brushed Stainless Steel  
2 KNX push-buttons with white LEDs and a central LED*



*ZITA CARRE Alu Natural Anodised  
2 KNX push-buttons with white LEDs and a central LED*



*ZITA CARRE Glossy Chromium  
2 KNX push-buttons with white LEDs and a central LED*

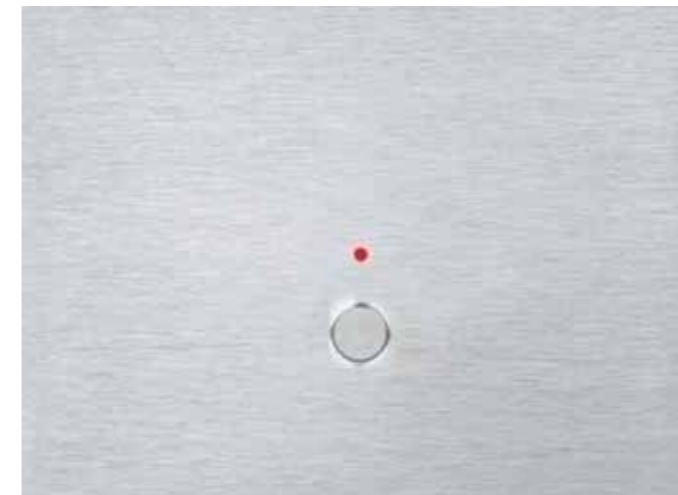

## ZITA BANDE

Puristic appearance with an accentuation of the surface and round push buttons are offered by ZITA BANDE. Particular the reflections of the integrated LEDs are setting a focus on the bigger frame.



*ZITA BANDE Alu Natural Anodised  
4 KNX push-buttons with white LEDs and a central LED*




*ZITA BANDE Brushed Stainless Steel  
2 KNX push-buttons with white LEDs and a central LED*






# LARA

# LARA

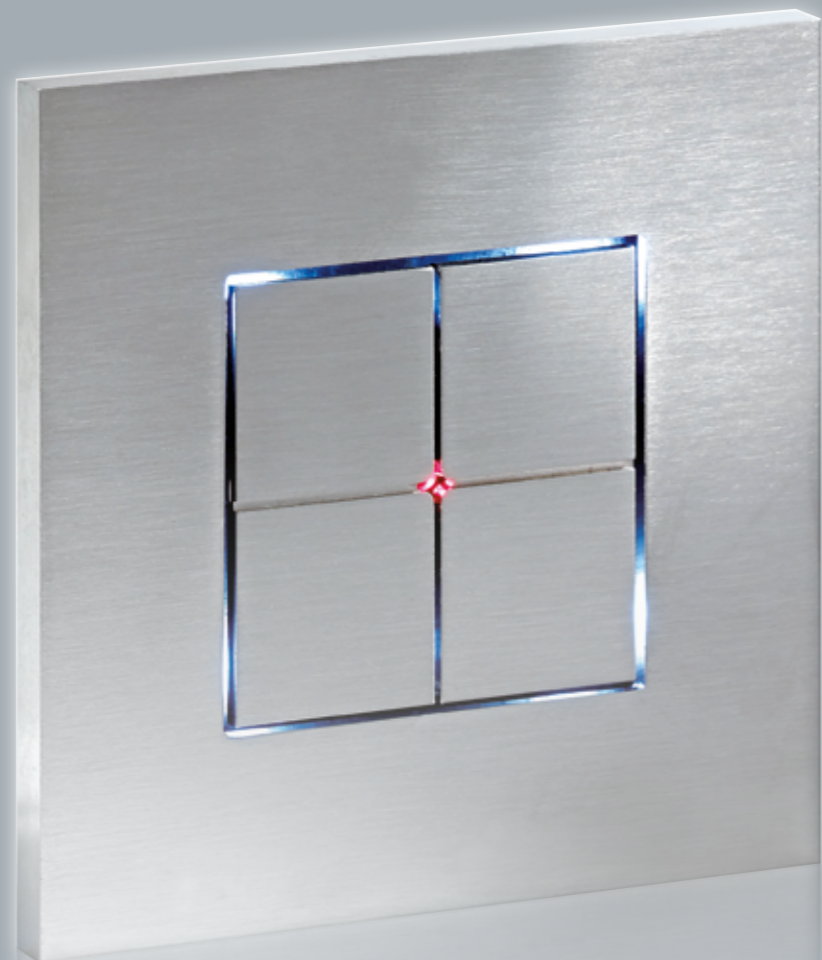


With its totally plane surface LARA sets new standards. The extreme plane design and the integrated push buttons are melting into a perfect appearance of aesthetics and functionality.

Suitable for an ambience the switches are available in glossy chromium, anodised brass or gilded, 24 carat.

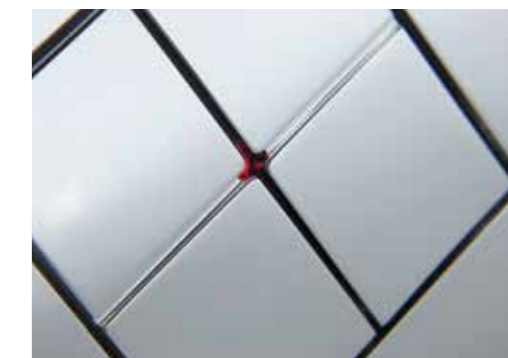


*Fascinating appearance and function: LARA Glossy Chromium*

## Color Indications LARA

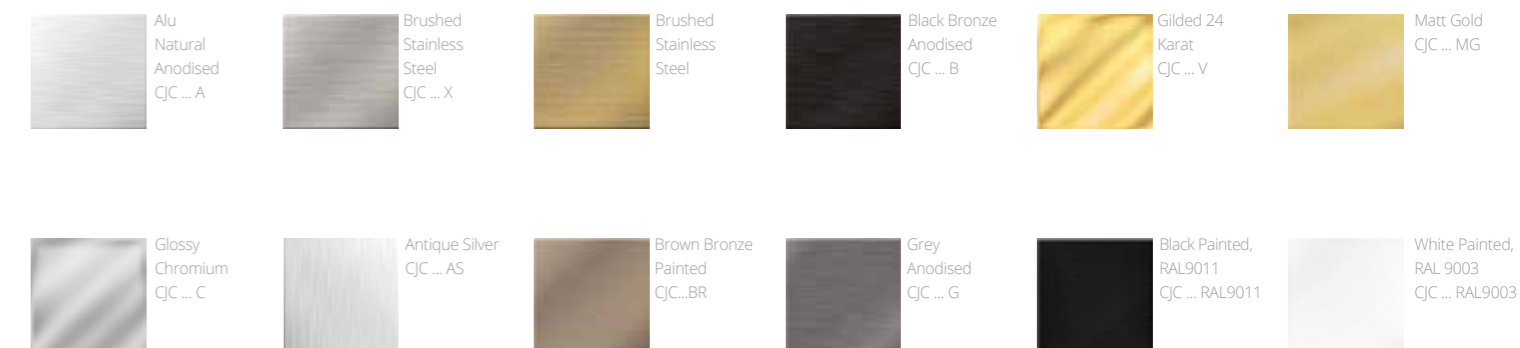

Further RAL Colors on request

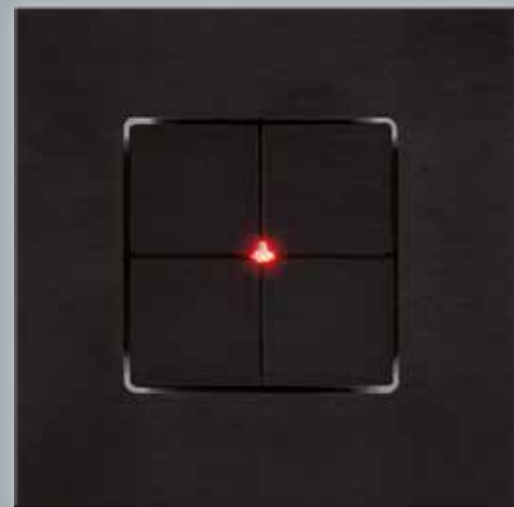


# LARA CARRE


This design switch collection offers both, single and 2/4 - fold push button functionality underneath its plane appearance .  
The backlight of the buttons glamorize the special character of the switch.



*LARA CARRE Glossy Chromium  
1 KNX push-button with white  
LEDs and a central LED*



*LARA CARRE Glossy Chromium  
4 KNX push-buttons with white  
LEDs and a central LED*

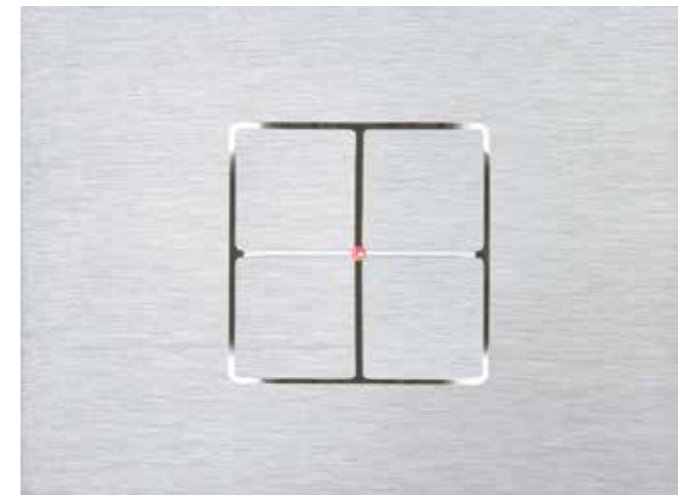

# LARA BANDE

The collection LARA BANDE highlights the plane appearance even more. Beyond that, the alternatively integrated temperature and humidity sensor offers more convenience and operation efficiency in home automation.



*LARA BANDE Alu Natural Anodised  
1 KNX push-button with white LEDs  
and a central LED*



*LARA BANDE Black Painted  
2/4 KNX push-buttons with white LEDs  
and a central LED*





# ANNA

---

# ANNA




Modern light switches as fascinating design objects for high requirements. The design switch collection ANNA is setting a new benchmark for modern interior. The glossy levers offer a special high tech appearance in combination with the Colored LEDs.



*A precious high tech appearance combined with a metal surface: ANNA Black Bronze Anodised*


## Color Indications ANNA

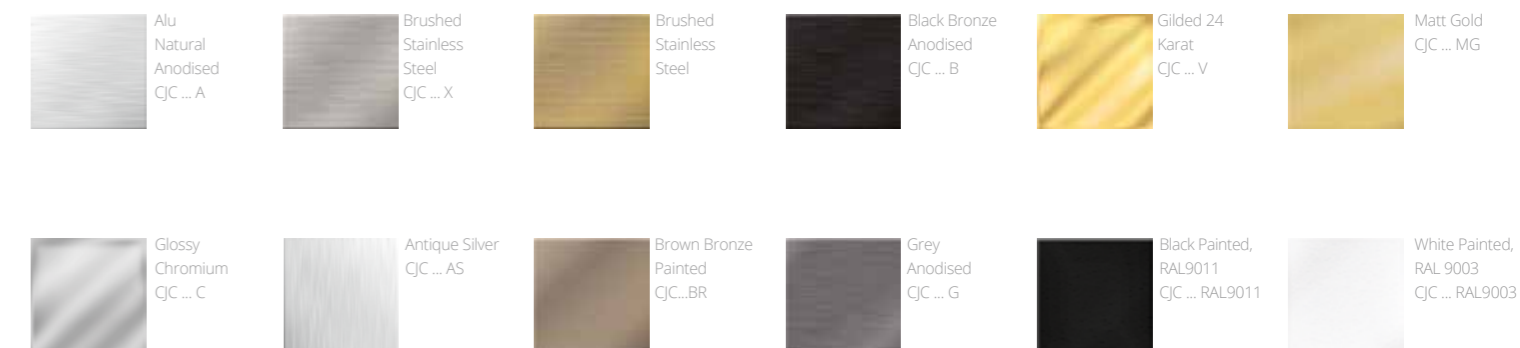

Further RAL Colors on request



# ANNA CARRE

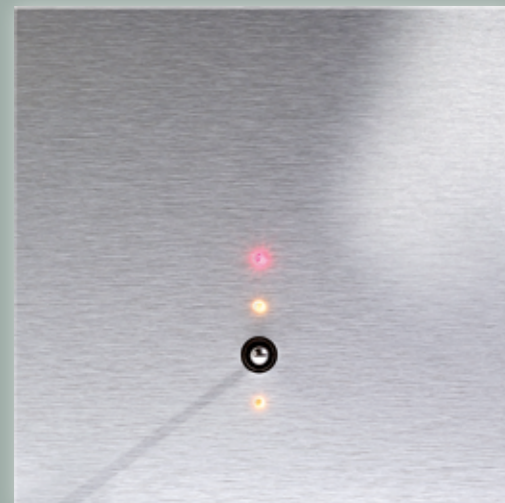

Fascinating appearance and high quality finish. Suitable for an ambience the switches are available in glossy chromium, anodised black bronze or brushed stainless steel.



*ANNA CARRE  
Alu Natural Anodised  
2 KNX levers with LEDs*



*ANNA CARRE White Painted  
2 KNX levers without LEDs*

# ANNA BANDE



ANNA BANDE stands for more individuality and offers a special highlight due to its technical aesthetics in combination with innovative technology. Up to 4 levers allow the switching and dimming as well as the regulation of multifarious functions in buildings.



*ANNA BANDE Alu Natural Anodised  
1 KNX levers with yellow LEDs and a  
central LED*



*ANNA BANDE Black Bronze Anodised  
1 KNX levers with yellow LEDs and a  
central LED*





# VICTOR ARNO



# VICTOR ARNO



Functionality in precious shape. The designframes VICTOR and ARNO are completing the design switch collections with a wide range of plug and socket applications including data transmission and television connection.




VICTOR CARRE Alu Natural  
Anodised with Schuko plug  
socket



ARNO CARRE White Painted  
with socket for Switzerland  
socket

## Color Indications VICTOR / ARNO

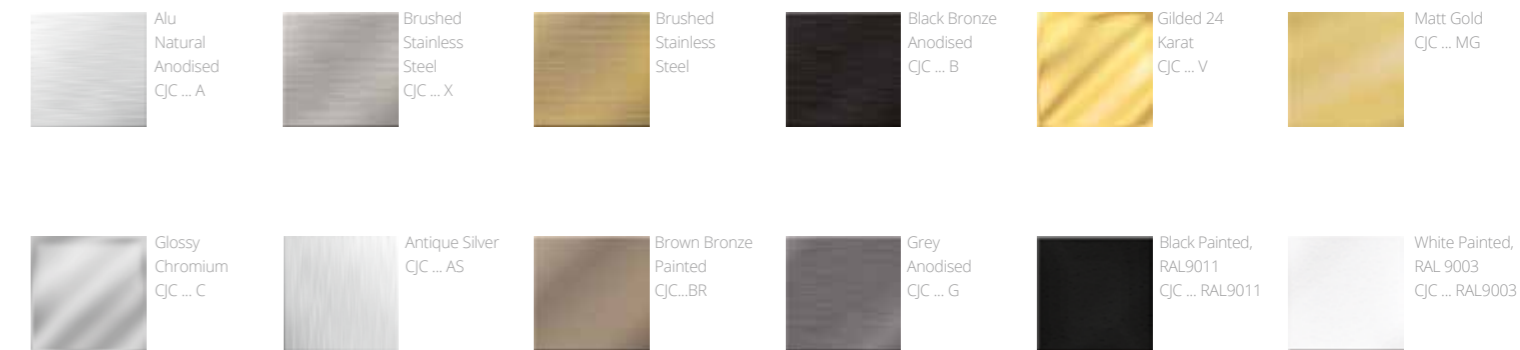


Further RAL Colors on request

# MARKING




Suitable for the planned functions several symbols are available. Depending on the collection, symbols will be added onto the push buttons or onto the frames. In addition to the wide range of standard symbols a lot of individual symbols or words can be added.

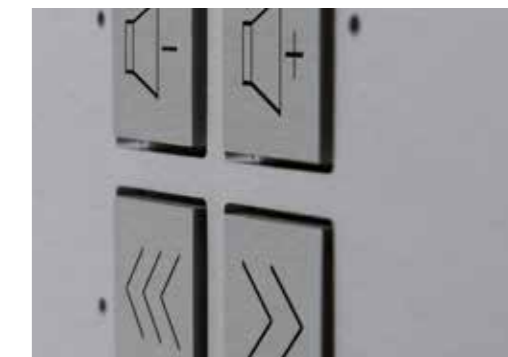

*Know what to switch at a glance*

## Standard Symbols

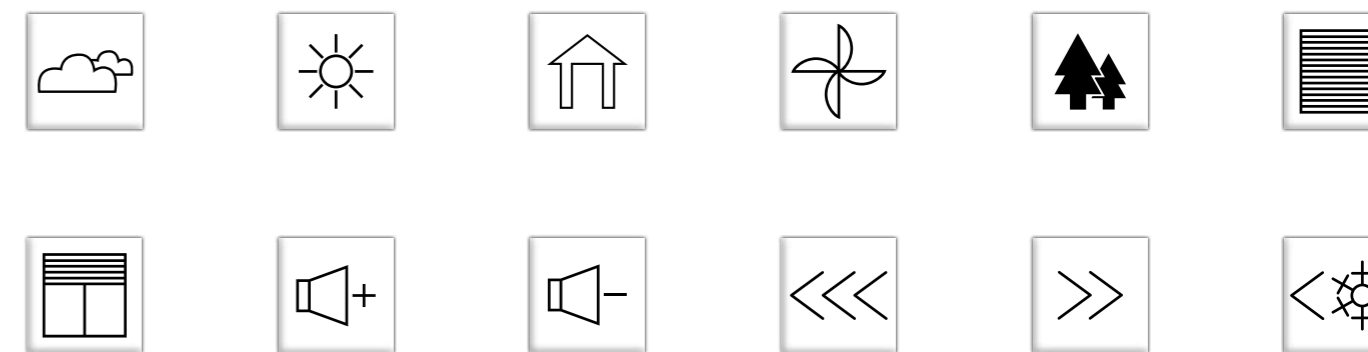



# SMART VISU


## Apple Mobile Web App „Smart Visu“

Mobile and convenient operation of your smart building. With the Apple mobile web application „Smart Visu“ intelligent building system technology based on KNX can be handled. Independent of your location functions and states can be controlled and operated easily.



# PRODUCT OVERVIEW



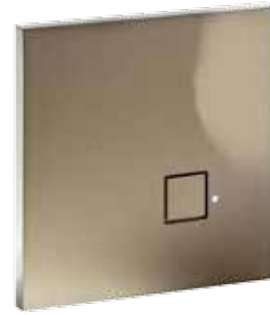

# LOLA CARRE

with LEDs

Type	Description	Type-No.	Order No.
	1 push-button KNX with LED	CJC2731	8961001XX
	1 push-button KNX with LEDs integrated temp & humidity sensor	CJC2731TH	8961051XX
	2 push-buttons KNX with LEDs	CJC2732	8961002XX
	2 push-buttons KNX with leds integrated temp & humidity Sensor	CJC2732TH	8961052XX
	3 push-buttons KNX with LEDs	CJC2733	8961003XX
	3 push-buttons KNX with leds integrated temp & humidity sensor	CJC2733TH	8961053XX
	4 push-buttons KNX with LEDs	CJC2734	8961004XX
	4 push-buttons KNX with leds integrated temp & humidity SENSOR	CJC2734TH	8961054XX

## \* Cat. 1

896...11	CJC...A	Alu Natural Anodised	
----------	---------	----------------------	--

## \* Cat. 2

896...21	CJC...B	Black Bronze Anodised	
----------	---------	-----------------------	--

896...22	CJC...G	Grey Anodised	
----------	---------	---------------	--

896...23	CJC...M	Brushed Stainless Steel	
----------	---------	-------------------------	--

896...24	CJC...BR	Brown Bronze Painted	
----------	----------	----------------------	--

896...27	CJC...RAL9011	Black Painted, RAL9011	
----------	---------------	------------------------	--

896...28	CJC...RAL9003	White Painted, RAL9003	
----------	---------------	------------------------	--

896...29	CJC...RALXXX	Customized Painted, Please quote RAL No.	
----------	--------------	--	--

## \* Cat. 3

896...31	CJC...X	Brushed Stainless Steel	
----------	---------	-------------------------	--

896...32	CJC...C	Glossy Chromium	
----------	---------	-----------------	--

## \* Cat. 4

896...41	CJC...V	Gilded 24 Karat	
----------	---------	-----------------	--

896...42	CJC...MG	Matt Gold	
----------	----------	-----------	--

896...43	CJC...AS	Antique Silver	
----------	----------	----------------	--

# LOLA CARRE


with LEDs horizontal

Type	Description	Type-No.	Order No.
	5 push-buttons KNX with LEDs, horizontal	CJC2735	8961005XX
	6 push-buttons KNX with LEDs, horizontal	CJC2736	8961006XX
	7 push-buttons KNX with LEDs, horizontal	CJC2737	8961007XX
	8 push-buttons KNX with LEDs, horizontal	CJC2738	8961008XX

# LOLA CARRE

with LEDs vertical

Type	Description	Type-No.	Order No.
	5 push-buttons KNX with LEDs, vertical	CJC2835	8961015XX
	6 push-buttons KNX with LEDs, vertical	CJC2836	8961016XX
	7 push-buttons KNX with LEDs, vertical	CJC2837	8961017XX
	8 push-buttons KNX with LEDs, vertical	CJC2838	8961018XX



# LOLA CARRE

no LEDs

Type	Description	Type-No.	Order No.
	1 push-button KNX no LED	CJC3031	8961201XX
	1 push-button KNX no LEDs; integrated temp & humidity sensor	CJC3031TH	8961251XX
	2 push-buttons KNX no LEDs	CJC3032	8961202XX
	2 push-buttons KNX no LEDs; integrated temp & humidity sensor	CJC3032TH	8961252XX
	3 push-buttons KNX no LEDs	CJC3033	8961203XX
	3 push-buttons KNX no LEDs; integrated temp & humidity sensor	CJC3033TH	8961253XX
	4 push-buttons KNX no LEDs	CJC3034	8961204XX
	4 push-buttons KNX no LEDs; integrated temp & humidity sensor	CJC3034TH	8961254XX

### \* Cat. 1

896...11	CJC...A	Alu Natural Anodised	
----------	---------	----------------------	--

### \* Cat. 2

896...21	CJC...B	Black Bronze Anodised	
----------	---------	-----------------------	--

896...22	CJC...G	Grey Anodised	
----------	---------	---------------	--

896...23	CJC...M	Brushed Stainless Steel	
----------	---------	-------------------------	--

896...24	CJC...BR	Brown Bronze Painted	
----------	----------	----------------------	--

896...27	CJC...RAL9011	Black Painted, RAL9011	
----------	---------------	------------------------	--

896...28	CJC...RAL9003	White Painted, RAL9003	
----------	---------------	---------------------------	--

896...29	CJC...RALXXX	Customized Painted, Please quote RAL No.	
----------	--------------	---	--

### \* Cat. 3

896...31	CJC...X	Brushed Stainless Steel	
----------	---------	-------------------------	--

896...32	CJC...C	Glossy Chromium	
----------	---------	-----------------	--

### \* Cat. 4

896...41	CJC...V	Gilded 24 Karat	
----------	---------	-----------------	--

896...42	CJC...MG	Matt Gold	
----------	----------	-----------	--

896...43	CJC...AS	Antique Silver	
----------	----------	----------------	--

# LOLA CARRE

no LEDs horizontal

Type	Description	Type-No.	Order No.
	5 push-buttons KNX no LEDs, horizontal	CJC3035	8961205XX
	6 push-buttons KNX no LEDs, horizontal	CJC3036	8961206XX
	7 push-buttons KNX no LEDs, horizontal	CJC3037	8961207XX
	8 push-buttons KNX no LEDs, horizontal	CJC3038	8961208XX

# LOLA CARRE

no LEDs vertical









Type	Description	Type-No.	Order No.
	5 push-buttons KNX no LEDs, vertical	CJC3135	8961215XX
	6 push-buttons KNX no LEDs, vertical	CJC3136	8961216XX
	7 push-buttons KNX no LEDs, vertical	CJC3137	8961217XX
	8 push-buttons KNX no LEDs, vertical	CJC3138	8961218XX






# LOLA BANDE

with LEDs

Type	Description	Type-No.	Order No.
	1 push-button KNX with LED	CJC2931	8961501XX
	1 push-buttons KNX with LEDs; integrated temp & humidity sensor	CJC2931TH	8961551XX
	2 push-buttons KNX with LEDs	CJC2932	8961502XX
	2 push-buttons KNX with LEDs; integrated temp & humidity sensor	CJC2932TH	8961552XX
	3 push-buttons KNX with LEDs	CJC2933	8961503XX
	3 push-buttons KNX with LEDs; integrated temp & humidity sensor	CJC2933TH	8961553XX
	4 push-buttons KNX with LEDs	CJC2934	8961504XX
	4 push-buttons KNX with LEDs; integrated temp & humidity sensor	CJC2934TH	8961554XX

## \* Cat. 1

896...11	CJC...A	Alu Natural Anodised	
----------	---------	----------------------	---

## \* Cat. 2

896...21	CJC...B	Black Bronze Anodised	
----------	---------	-----------------------	---

896...22	CJC...G	Grey Anodised	
----------	---------	---------------	---

896...23	CJC...M	Brushed Stainless Steel	
----------	---------	-------------------------	---

896...24	CJC...BR	Brown Bronze Painted	
----------	----------	----------------------	---

896...27	CJC...RAL9011	Black Painted, RAL9011	
----------	---------------	------------------------	---

896...28	CJC...RAL9003	White Painted, RAL9003	
----------	---------------	------------------------	---

896...29	CJC...RALXXX	Customized Painted, Please quote RAL No.	
----------	--------------	--	---

## \* Cat. 3

896...31	CJC...X	Brushed Stainless Steel	
----------	---------	-------------------------	--


896...32	CJC...C	Glossy Chromium	
----------	---------	-----------------	---

## \* Cat. 4

896...41	CJC...V	Gilded 24 Karat	
----------	---------	-----------------	---







896...42	CJC...MG	Matt Gold	
----------	----------	-----------	---

896...43	CJC...AS	Antique Silver	
----------	----------	----------------	---



# LOLA BANDE









no LEDs

Type	Description	Type-No.	Order No.
	1 push-button KNX no LED	CJC3231	8961701XX
	1 push-button KNX no LED; Integrated temp & humidity sensor	CJC3231TH	8961751XX
	2 push-buttons KNX no LEDs	CJC3232	8961702XX
	2 push-buttons KNX no LEDs; Integrated temp & humidity sensor	CJC3232TH	8961752XX
	3 push-buttons KNX no LEDs	CJC3233	8961703XX
	3 push-buttons KNX no LEDs; Integrated temp & humidity sensor	CJC3233TH	8961753XX
	4 push-buttons KNX no LEDs	CJC3234	8961704XX
	4 push-buttons KNX no LEDs; Integrated temp & humidity sensor	CJC3234TH	8961754XX



# MONA CARRE

with LEDs

Type	Description	Type-No.	Order No.
	1 push-button KNX with LED	CJC2781	8962001XX
	2 push-buttons KNX with LEDs	CJC2782	8962002XX
	2 push-buttons KNX with LEDs; integrated temp & humidity sensor	CJC2782TH	8962052XX
	3 push-buttons KNX with LEDs	CJC2783	8962003XX
	4 push-buttons KNX with LEDs	CJC2785	8962004XX
	4 push-buttons KNX with LEDs; integrated temp & humidity sensor	CJC2785TH	8962054XX
	4 push-buttons KNX with LEDs	CJC2784	8962005XX
	8 push-buttons KNX with LEDs, horizontal	CJC2885	8962008XX

### \* Cat. 1

896...11	CJC...A	Alu Natural Anodised	
----------	---------	----------------------	---

### \* Cat. 2


896...21	CJC...B	Black Bronze Anodised	
----------	---------	-----------------------	---

896...22	CJC...G	Grey Anodised	
----------	---------	---------------	---

896...23	CJC...M	Brushed Stainless Steel	
----------	---------	-------------------------	---

896...24	CJC...BR	Brown Bronze Painted	
----------	----------	----------------------	---

896...27	CJC...RAL9011	Black Painted, RAL9011	
----------	---------------	------------------------	---

896...28	CJC...RAL9003	White Painted, RAL9003	
----------	---------------	------------------------	---

896...29	CJC...RALXXX	Customized Painted, Please quote RAL No.	
----------	--------------	--	---

### \* Cat. 3

896...31	CJC...X	Brushed Stainless Steel	
----------	---------	-------------------------	--

896...32	CJC...C	Glossy Chromium	
----------	---------	-----------------	---

### \* Cat. 4

896...41	CJC...V	Gilded 24 Karat	
----------	---------	-----------------	---


896...42	CJC...MG	Matt Gold	
----------	----------	-----------	---

896...43	CJC...AS	Antique Silver	
----------	----------	----------------	---



# MONA CARRE








no LEDs

Type	Description	Type-No.	Order No.
	1 push-button KNX no LED	CJC2791	8962201XX
	2 push-buttons KNX no LEDs	CJC2792	8962202XX
	2 push-buttons KNX no LEDs; integrated temp & humidity sensor	CJC2792TH	8962252XX
	3 push-buttons KNX no LEDs	CJC2793	8962203XX
	4 push-buttons KNX no LEDs	CJC2795	8962204XX
	4 push-buttons KNX no LEDs; integrated temp & humidity sensor	CJC2795TH	8962254XX
	4 push-buttons KNX no LEDs	CJC2794	8962205XX
	8 push-buttons KNX no LEDs, horizontal	CJC2895	8962208XX



# MONA BANDE

with LEDs

Type	Description	Type-No.	Order No.
	1 push-button KNX with LED	CJC2981	8962501XX
	2 push-buttons KNX with LEDs	CJC2982	8962502XX
	2 push-buttons KNX with LEDs; integrated temp & humidity sensor	CJC2982TH	8962552XX
	3 push-buttons KNX with LEDs	CJC2983	8962503XX
	4 push-buttons KNX with LEDs	CJC2985	8962504XX
	4 push-buttons KNX with LEDs; integrated temp & humidity sensor	CJC2985TH	8962554XX
	4 push-buttons KNX with LEDs	CJC2984	8962505XX

### \* Cat. 1

896...11	CJC...A	Alu Natural Anodised	
----------	---------	----------------------	---

### \* Cat. 2

896...21	CJC...B	Black Bronze Anodised	
----------	---------	-----------------------	---

896...22	CJC...G	Grey Anodised	
----------	---------	---------------	---

896...23	CJC...M	Brushed Stainless Steel	
----------	---------	-------------------------	---

896...24	CJC...BR	Brown Bronze Painted	
----------	----------	----------------------	---

896...27	CJC...RAL9011	Black Painted, RAL9011	
----------	---------------	------------------------	---

896...28	CJC...RAL9003	White Painted, RAL9003	
----------	---------------	------------------------	---

896...29	CJC...RALXXX	Customized Painted, Please quote RAL No.	
----------	--------------	--	---

### \* Cat. 3

896...31	CJC...X	Brushed Stainless Steel	
----------	---------	-------------------------	--

896...32	CJC...C	Glossy Chromium	
----------	---------	-----------------	---

### \* Cat. 4

896...41	CJC...V	Gilded 24 Karat	
----------	---------	-----------------	---








896...42	CJC...MG	Matt Gold	
----------	----------	-----------	---

896...43	CJC...AS	Antique Silver	
----------	----------	----------------	---



# MONA BANDE

no LEDs

Type	Description	Type-No.	Order No.
	1 push-button KNX no LED	CJC2991	8962701XX
	2 push-buttons KNX no LEDs	CJC2992	8962702XX
	2 push-buttons KNX no LEDs; integrated temp & humidity sensor	CJC2992TH	8962752XX
	3 push-buttons KNX no LEDs	CJC2993	8962703XX
	4 push-buttons KNX no LEDs	CJC2995	8962704XX
	4 push-buttons KNX no LEDs; integrated temp & humidity sensor	CJC2995TH	8962754XX
	4 push-buttons KNX no LEDs	CJC2994	8962705XX





## ZITA CARRE

with LEDs

Type	Description	Type-No.	Order No.
	1 push-button KNX with LED	CJC2761	8963001XX
	2 push-buttons KNX with LEDs	CJC2762	8963002XX
	2 push-buttons KNX with LEDs; integrated temp & humidity sensor	CJC2762TH	8963052XX
	3 push-buttons KNX with LEDs	CJC2763	8963003XX
	4 push-buttons KNX with LEDs	CJC2765	8963004XX
	4 push-buttons KNX with LEDs; integrated temp & humidity sensor	CJC2765TH	8963054XX
	4 push-buttons KNX with LEDs	CJC2764	9863005XX

### \* Cat. 1

896...11	CJC...A	Alu Natural Anodised	
----------	---------	----------------------	--

### \* Cat. 2

896...21	CJC...B	Black Bronze Anodised	
----------	---------	-----------------------	--

896...22	CJC...G	Grey Anodised	
----------	---------	---------------	--

896...23	CJC...M	Brushed Stainless Steel	
----------	---------	-------------------------	--

896...24	CJC...BR	Brown Bronze Painted	
----------	----------	----------------------	--

896...27	CJC...RAL9011	Black Painted, RAL9011	
----------	---------------	------------------------	--

896...28	CJC...RAL9003	White Painted, RAL9003	
----------	---------------	------------------------	--

896...29	CJC...RALXXX	Customized Painted, Please quote RAL No.	
----------	--------------	--	--

### \* Cat. 3

896...31	CJC...X	Brushed Stainless Steel	
----------	---------	-------------------------	--


896...32	CJC...C	Glossy Chromium	
----------	---------	-----------------	--

### \* Cat. 4

896...41	CJC...V	Gilded 24 Karat	
----------	---------	-----------------	--

896...42	CJC...MG	Matt Gold	
----------	----------	-----------	--


896...43	CJC...AS	Antique Silver	
----------	----------	----------------	--



## ZITA BANDE

with LEDs

Type	Description	Type-No.	Order No.
	1 push-button KNX with LED	CJC2861	8963501XX
	2 push-buttons KNX with LEDs	CJC2862	8963502XX
	2 push-buttons KNX with LEDs; integrated temp & humidity sensor	CJC2862TH	8963552XX
	3 push-buttons KNX with LEDs	CJC2863	8963503XX
	4 push-buttons KNX with LEDs	CJC2865	8963504XX
	4 push-buttons KNX with LEDs; integrated temp & humidity sensor	CJC2865TH	8963554XX
	4 push-buttons KNX with LEDs	CJC2864	8963505XX



# LARA CARRE

with LEDs

Type	Description	Type-No.	Order No.
	1 push-button KNX with LED	CJC2741	8964001XX
	1 push-button KNX with LED; integrated temp & humidity sensor	CJC2741TH	8964051XX
	2/4 push-buttons KNX with LEDs	CJC2742	8964002XX
	2/4 push-buttons KNX with LEDs; integrated temp & humidity sensor	CJC2742TH	8964052XX
	2/4 + 1 push-button KNX with LEDs	CJC2841	8964003XX
	2/4 + 2/4 push-buttons KNX with LEDs	CJC2842	8964004XX
	1 push-button KNX with LEDs & 1 socket outlet / 2 modules	CJC2941	8964005XX
	2/4 push-buttons KNX with LEDs & 1 socket outlet / 2 modules	CJC2942	8964006XX

### \* Cat. 1

896...11	CJC...A	Alu Natural Anodised	
----------	---------	----------------------	--

### \* Cat. 2


896...21	CJC...B	Black Bronze Anodised	
896...22	CJC...G	Grey Anodised	
896...23	CJC...M	Brushed Stainless Steel	
896...24	CJC...BR	Brown Bronze Painted	
896...27	CJC...RAL9011	Black Painted, RAL9011	
896...28	CJC...RAL9003	White Painted, RAL9003	
896...29	CJC...RALXXX	Customized Painted, Please quote RAL No.	

### \* Cat. 3

896...31	CJC...X	Brushed Stainless Steel	
896...32	CJC...C	Glossy Chromium	

### \* Cat. 4

896...41	CJC...V	Gilded 24 Karat	
896...42	CJC...MG	Matt Gold	
896...43	CJC...AS	Antique Silver	



# LARA BANDE

with LEDs

Type	Description	Type-No.	Order No.
	1 push-button KNX with LED	CJC3041	8964501XX
	1 push-button KNX with LED; integrated temp & humidity sensor	CJC3041TH	8964551XX
	2/4 push-buttons KNX with LEDs	CJC3042	8964502XX
	2/4 push-buttons KNX with LEDs; integrated temp & humidity sensor	CJC3042TH	8964552XX




# ANNA CARRE

with LEDs

Type	Description	Type-No.	Order No.
	1 lever with LEDs	CJC1021	8965001XX
	1 lever with LEDs; integrated temp & humidity sensor	CJC1021TH	8965051XX
	2 levers with LEDs	CJC1022	8965002XX
	2 levers with LEDs; integrated temp & humidity sensor	CJC1022TH	8965052XX
	3 levers with LEDs	CJC1023	8965003XX
	3 levers with LEDs; integrated temp & humidity sensor	CJC1023TH	8965053XX
	4 levers with LEDs	CJC1024	8965004XX
	4 levers with LEDs; integrated temp & humidity sensor	CJC1024TH	8965054XX

## \* Cat. 1

896...11	CJC...A	Alu Natural Anodised	
----------	---------	----------------------	---

## \* Cat. 2

896...21	CJC...B	Black Bronze Anodised	
----------	---------	-----------------------	---

896...22	CJC...G	Grey Anodised	
----------	---------	---------------	---

896...23	CJC...M	Brushed Stainless Steel	
----------	---------	-------------------------	---

896...24	CJC...BR	Brown Bronze Painted	
----------	----------	----------------------	---

896...27	CJC...RAL9011	Black Painted, RAL9011	
----------	---------------	------------------------	---

896...28	CJC...RAL9003	White Painted, RAL9003	
----------	---------------	------------------------	---

896...29	CJC...RALXXX	Customized Painted, Please quote RAL No.	
----------	--------------	--	---

## \* Cat. 3

896...31	CJC...X	Brushed Stainless Steel	
----------	---------	-------------------------	--

896...32	CJC...C	Glossy Chromium	
----------	---------	-----------------	---

## \* Cat. 4

896...41	CJC...V	Gilded 24 Karat	
----------	---------	-----------------	---









896...42	CJC...MG	Matt Gold	
----------	----------	-----------	---

896...43	CJC...AS	Antique Silver	
----------	----------	----------------	---



# ANNA CARRE

no LEDs




Type	Description	Type-No.	Order No.
	1 lever no LEDs	CJC1601	8965201XX
	1 lever no LEDs; integrated temp & humidity sensor	CJC1601TH	8965251XX
	2 levers no LEDs	CJC1602	8965202XX
	2 levers no LEDs; integrated temp & humidity sensor	CJC1602TH	8965252XX
	3 levers no LEDs	CJC1603	8965203XX
	3 levers no LEDs; integrated temp & humidity sensor	CJC1603TH	8965253XX
	4 levers no LEDs	CJC1604	8965204XX
	4 levers no LEDs; integrated temp & humidity sensor	CJC1604TH	8965254XX





# ANNA BANDE

with LEDs

Type	Description	Type-No.	Order No.
	1 lever with LEDs	CJC1321	8965501XX
	1 lever with LEDs; integrated temp & humidity sensor	CJC1321TH	8965551XX
	2 levers with LEDs	CJC1322	8965502XX
	2 levers with LEDs; integrated temp & humidity sensor	CJC1322TH	8965552XX
	3 levers with LEDs	CJC1323	8965503XX
	3 levers with LEDs; integrated temp & humidity sensor	CJC1323TH	8965553XX
	4 levers with LEDs	CJC1324	8965504XX
	4 levers with LEDs; integrated temp & humidity sensor	CJC1324TH	8965554XX

### \* Cat. 1

896...11	CJC...A	Alu Natural Anodised	
----------	---------	----------------------	---

### \* Cat. 2


896...21	CJC...B	Black Bronze Anodised	
----------	---------	-----------------------	---

896...22	CJC...G	Grey Anodised	
----------	---------	---------------	---

896...23	CJC...M	Brushed Stainless Steel	
----------	---------	-------------------------	---

896...24	CJC...BR	Brown Bronze Painted	
----------	----------	----------------------	---

896...27	CJC...RAL9011	Black Painted, RAL9011	
----------	---------------	------------------------	---

896...28	CJC...RAL9003	White Painted, RAL9003	
----------	---------------	------------------------	---

896...29	CJC...RALXXX	Customized Painted, Please quote RAL No.	
----------	--------------	--	---

### \* Cat. 3

896...31	CJC...X	Brushed Stainless Steel	
----------	---------	-------------------------	--

896...32	CJC...C	Glossy Chromium	
----------	---------	-----------------	---

### \* Cat. 4

896...41	CJC...V	Gilded 24 Karat	
----------	---------	-----------------	---









896...42	CJC...MG	Matt Gold	
----------	----------	-----------	---

896...43	CJC...AS	Antique Silver	
----------	----------	----------------	---



# ANNA BANDE






no LEDs

Type	Description	Type-No.	Order No.
	1 lever no LEDs	CJC3621	8965701XX
	1 lever no LEDs; integrated temp & humidity sensor	CJC3621TH	8965751XX
	2 levers no LEDs	CJC3622	8965702XX
	2 levers no LEDs; integrated temp & humidity sensor	CJC3622TH	8965752XX
	3 levers no LEDs	CJC3623	8965703XX
	3 levers no LEDs; integrated temp & humidity sensor	CJC3623TH	8965753XX
	4 levers no LEDs	CJC3624	8965704XX
	4 levers no LEDs; integrated temp & humidity sensor	CJC3624TH	8965754XX




## VICTOR CARRE







standard socket frame

Type	Description	Type-No.	Order No.
	1 socket outlet 2 modules	CJC0813	8960001XX
	2 socket outlet 4 modules	CJC0823	8960002XX
	3 socket outlet 6 modules	CJC0833	8960003XX
	4 socket outlet 8 modules	CJC0843	8960004XX
	5 socket outlet 10 modules	CJC0853	8960005XX



### \* Cat. 1

896...11	CJC...A	Alu Natural Anodised	
----------	---------	----------------------	---




### \* Cat. 2

896...21	CJC...B	Black Bronze Anodised	
896...22	CJC...G	Grey Anodised	
896...23	CJC...M	Brushed Stainless Steel	
896...24	CJC...BR	Brown Bronze Painted	
896...27	CJC...RAL9011	Black Painted, RAL9011	
896...28	CJC...RAL9003	White Painted, RAL9003	
896...29	CJC...RALXXX	Customized Painted, Please quote RAL No.	

### \* Cat. 3

896...31	CJC...X	Brushed Stainless Steel	
896...32	CJC...C	Glossy Chromium	






### \* Cat. 4

896...41	CJC...V	Gilded 24 Karat	
896...42	CJC...MG	Matt Gold	
896...43	CJC...AS	Antique Silver	



## ARNO CARRE





socket frame for Swiss standard




Type	Description	Type-No.	Order No.
	1 socket outlet 2 modules	CJC0113	8960011XX
	2 socket outlet 4 modules	CJC0223	8960012XX
	3 socket outlet 6 modules	CJC0333	8960013XX
	4 socket outlet 8 modules	CJC0443	8960014XX
	5 socket outlet 10 modules	CJC0553	8960015XX



# STANDARD CONNECTION

components for design switches

Type	Description	Color	Type-No.	Order No.	PU
	Loudspeaker Concept45, 45 mm wide, with clamp terminals Stereo according to DIN 41 529	white	00503531	8986301	10
		anthracite	00503551	8986302	10
		aluminium	00503571	8986303	10
	Antenna socket Concept 45, 45 mm wide, 2-hole socket, for antennas, BK and satellite receiver devices End box socket, frequency: 5-862 MHz, coupling attenuation: 1 dB, back-channel attenuation: 14 dB, EMV protection class A	white	00524211	8986311	10
		anthracite	00524311	8986312	10
		aluminium	00524411	8986313	10
	Antenna socket Concept 45, 45 mm wide, according to DIN 45 330, IEC and FTZ-directives, for antennas, BK and satellite receiver devices End box socket, frequency: 5-862 MHz, coupling attenuation: 5-862 MHz 1 dB, 950-2500 MHz 2 dB, back-channel attenuation: 14 dB, EMV protection class A, for single units (3-hole end box socket) *  * remote supply via SAT output.	white	00524911	8986321	10
		anthracite	00525011	8986322	10
		aluminium	00525111	8986323	10
	SCHUKO built-in socket Concept 45, 45 mm wide, with clamp terminals 2-pole, 16 A 250 V~, with connection terminals according to VDE 0620, 1-gang, 0° straight, with child protection	white	00414111	8986331	20
		anthracite	00512111	8986332	20
		aluminium	00516111	8986333	20

Type	Description	Color	Type-No.	Order No.	PU
	Export built-in socket Concept 45 with earth pin, 45 mm wide, with clamp terminals	white	00414341	8986341	20
		anthracite	00512941	8986342	20
		aluminium	00516941	8986343	20
	Export built-in socket Concept 45, 45 mm wide, with clamp terminals to Swiss standard	white		8986351	10
		anthracite		8986352	10
		aluminium		8986353	10
	Blanking cover for Concept 45 Cover as blind plug for a device	white	00416211	8986361	10
		anthracite	00511911	8986362	10
		aluminium	00515911	8986363	10











# COMMUNICATION TECHNOLOGY

components for design switches

Type	Description	Color	Type-No.	Order No.	PU
	Concept 45 mounting frame receiving from 2 Keystone	white	00934971	8986401	10
		anthracite	00934951	8986400	10
	BTR Keystone Cat.6A, straight cable outlet	chrom	00935011	8986402	10
	Keystone Cat.6, unshielded, straight cable outlet	black	00935031	8986403	10
	Keystone Cat.6A, fullshielded, straight cable outlet	chrom	00935051	8986404	10
	Keystone Cat.6a, fullshielded, cable outlet 90° angled	chrom	00935071	8986405	10
	Keystone USB 3.0	black	00935091	8986406	10

Type	Description	Color	Type-No.	Order No.	PU
	Keystone HDMI	white	00935151	8986407	10
	Keystone Cinch	white	00935211	8986408	10
		yellow	00935231	8986409	
		red	00935251	8986410	
	Keystone F-contact	black	00935271	8986411	10
		white	00935291	8986412	
	Keystone PAL-contact	black	00935311	8986413	10
		white	00935331	8986414	
	Keystone BNC-contact	black	00935411	8986415	10
		white	00935431	8986416	
	Keystone blind covers	anthracite	00935191	8986418	10
		white	00935171	8986417	

# TECHNICAL SPECIFICATIONS

KNX design switches



BUS-Couplingunit:	integrated
Power supply:	21 V .... 29V DC EIB
Auxiliary power:	no
Charging rate: 4 push buttons, all with LED 100% 4 push buttons, all with LED 10%	10mA (29V) 5mA (29V)
BUS connection:	WAGO bus connectors
Protection class:	IP 10 (with assembly frame)
Operating temperature:	-5 °C .. 45 °C
KNX programming button and LED:	on front and back
max. group addresses:	86
max. classifications:	86
Number of comunacationobjects:	71
ETS time for programming the application:	ca. 30 seconds


## ETS APPLICATION



### LED function:

Up to 8 feedback LEDs may be setup individually with the following functionality:


- LEDs off
- LEDs always on
- operation indication of corresponding button
- LEDs activated via separate communication object with timing and logic functions
- If LEDs are not used, timing and logic functions may be used

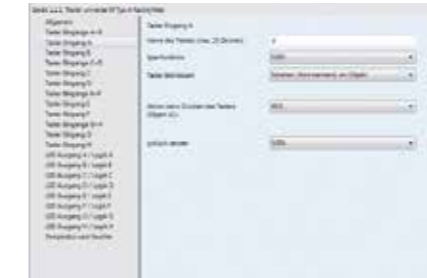

### Push Button functions:

Up to 8 buttons may be setup individually in single mode or in rocker mode. This functions are available for each button:

- std. mode with 1 object for bit values, 1 byte values, 2 byte values and 4 byte values
- std. mode with 3 objects for bit values, 1 byte values (useful for RGB values setting when used with new LED lighting)

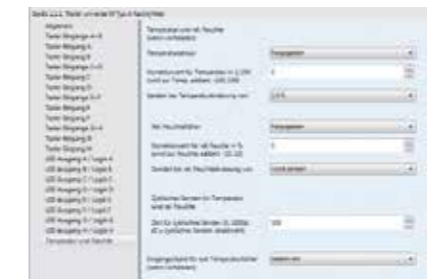

### Temperature function:

An optional temperature and humidity sensor may be setup with:

- offset adjustment
- circlic sending and sending by value change.

for bus logic. Up to 2 orientation LEDs may be setup individually with the following functions:

- LEDs off
- LEDs always on
- LEDs activated via separate communication object

All LEDs are dimmable and may be adjusted in their brightness for individual requirements by day-/night-switching.

- press and release mode for bit values, 1 byte values and 2 byte values
- long and short mode with bit values, 1 byte values and 2 byte values
- dimming mode including single button control
- shutter mode including single button control
- scene mode, including scene saving control
- separate rocker function for switching, dimming and blind / shutter control



Lingg & Janke  
KNX/EIB Systemhaus  
Zeppelinstraße 30  
D-78315 Radolfzell

Tel.+49 (0) 7732 945 57 50  
Fax+49 (0) 7732 945 57 99  
E-Mail [info@lingg-janke.de](mailto:info@lingg-janke.de)  
[www.lingg-janke.de](http://www.lingg-janke.de)  
[www.knx-designschalter.de](http://www.knx-designschalter.de)





